

ARL 66-0238
NOVEMBER 1966



Aerospace Research Laboratories

AD 649606

GENERALIZED LAW OF THE WALL AND EDDY VISCOSITY MODEL FOR WALL BOUNDARY LAYERS

GDALIA KLEINSTEIN
NEW YORK UNIVERSITY
BRONX, NEW YORK

Contract No. AF 33(615)-2215
Project No. 7064

Distribution of this document is unlimited

OFFICE OF AEROSPACE RESEARCH
United States Air Force



ARCHIVE COPY

DDC
RECEIVED
APR 7 1967
RECEIVED
C

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified requesters may obtain copies of this report from the Defense Documentation Center, (DDC), Cameron Station, Alexandria, Virginia. All others should apply to the Clearinghouse for Scientific and Technical Information.

ACCESSION FOR	
CFSTI	W I T E S O I O N <input checked="" type="checkbox"/>
DDC	BLUF SEC 1.4 <input type="checkbox"/>
UNANNOUNCED	<i>Per statement on Doc</i>
JUSTIFICATION	
BY <i>hm</i>	
DISTRIBUTION/AVAILABILITY CODES	
DIST.	AVAIL. and or SPECIAL
1	

Copies of ARL Technical Documentary Reports should not be returned to Aerospace Research Laboratories unless return is required by security considerations, contractual obligations or notices on a specified document.

BLANK PAGE

ARL 66-0238

**GENERALIZED LAW OF THE WALL AND EDDY VISCOSITY
MODEL FOR WALL BOUNDARY LAYERS**

GDALIA KLEINSTEIN

**NEW YORK UNIVERSITY
BRONX, NEW YORK**

NOVEMBER 1966

**Contract No. AF 33(615)-2215
Project No. 7064**

Distribution of this document is unlimited

**AEROSPACE RESEARCH LABORATORIES
OFFICE OF AEROSPACE RESEARCH
UNITED STATES AIR FORCE
WRIGHT-PATTERSON AIR FORCE BASE, OHIO**

FOREWORD

This interim report was prepared by Dr. Gdalia Kleinstein, Research Associate Professor of Aeronautics and Astronautics at New York University, and presents research carried out under a National Science Foundation Institutional Grant, "Statistical Methods and Their Application to Fluid Dynamics Problems", and Contract No. AF33(615)-2215, "Boundary Layer Characteristics for Hypersonic Flow in the Presence of Mass Addition", Project No. 7064.

ABSTRACT

Based on the logarithmic velocity distribution at distances not so far from the wall and a turbulent shear variation proportional to the cubic power of the wall distance in the immediate proximity of the wall, an analytical model for an eddy viscosity throughout the wall region is derived leading to a closed form expression for the velocity distribution. An extension of the above analysis to include shear variation results in a generalized law of the wall from which the effect of Reynolds number on the velocity distribution is derived. While many applications of the generalized solution are envisaged, as an example, the velocity distribution for the case of injection or suction is considered. The theoretical result is shown to be in agreement with available experimental data.

TABLE OF CONTENTS

<u>SECTION</u>		<u>PAGE</u>
I	Introduction	1
II	Analysis	3
	1. Introduction	3
	2. Constant Shear Solution	4
	3. Variable Shear Solution	6
	4. The Law of the Wall for Injection or Suction	11
III	Summary	13
	References	15
	Figures	16

LIST OF FIGURES

<u>FIGURE</u>	<u>TITLE</u>
1	The Law of the Wall for a Constant Shear
2	A Comparison between the Present Analysis and the Experiments of Lindgren ⁹
3	Variation of the Eddy Viscosity in the Wall Region Close to the Wall (Abbrecht and Churchill ¹⁰)
4a	Law of the Wall for Injection or Suction ($v_w^+ = +0.45$)
4b	Law of the Wall for Injection or Suction ($v_w^+ = +0.064$)
4c	Law of the Wall for Injection or Suction ($v_w^+ = -0.051$)
4d	Law of the Wall for Injection or Suction ($v_w^+ = -0.066$)

NOMENCLATURE

\bar{u}	mean flow velocity (streamwise component)
u_τ	friction velocity (local) $u_\tau = [\tau(y)/\rho]^{1/2}$
u^*	wall friction velocity $u^* = (u_\tau)_w = [\tau(0)/\rho]^{1/2}$
u^+	dimensionless mean flow velocity $u^+ = \bar{u}/u^*$
u_τ^+	dimensionless friction velocity $u_\tau^+ = u_\tau/u^*$
ϵ	eddy viscosity
ϵ^+	dimensionless eddy viscosity ϵ/ν
y	normal coordinate
y^+	dimensionless normal coordinate $y^+ = yu^*/\nu$
v_w^+	dimensionless injection velocity $v_w^+ = v_w/u^*$

INTRODUCTION

The validity of the logarithmic nature of the law of the wall, which may be derived on the basis of substantially different underlying assumptions such as dimensional analysis as well as the Malkus theory¹, has been satisfactorily verified by a large volume of experimental data. Since the law of the wall as such does not hold through the transition region (buffer zone) and obviously not in the laminar sublayer, it has been desired to obtain a formulation which will connect continuously and smoothly the laminar sublayer velocity distribution to the law of the wall. Most successful has been Reichardt² who from considerations of the behavior of the velocity fluctuations in the immediate vicinity of the wall deduced that the eddy viscosity must grow at least as the cubic power of y . Accordingly, by choosing a function which satisfies the y^3 behavior near the wall; and, asymptotically approaches the required linear dependence on y , he was able to construct an eddy viscosity model which in turn led to a velocity distribution in agreement with experimental data from $y = 0$ to the law of the wall region. Other formulas for the eddy viscosity have been suggested by Deissler³ and Van Driest⁴ which, although successfully predict the velocity distribution, raise the objection that they do not satisfy the y^3 requirement of Reichardt's theoretical result.

In this paper it is shown that by taking the velocity as the independent variable, an eddy viscosity model can be derived from the law of the wall and Reichardt's y^3 decay requirement without introducing a new arbitrary function. The resulting eddy viscosity model yields an integrable closed form expression for the velocity distribution as compared with the models of Reichardt, Deissler and Van Driest which require a numerical integration.

By employing a simple transformation the above formulation is further extended to include the effect of shear variation. Consequently, a generalized form for the law of the wall is obtained; and in particular it is shown that

for regions where the eddy viscosity is much larger than the kinematic viscosity the law of the wall has a universal nature independent of the shear distribution. The application of this result to pipe flow provides an explanation for the effect of Reynolds number on the velocity distribution which has been observed by Hinze⁵. As an additional example, the generalized formula has been applied to the problem of wall injection and suction where good agreement with experimental data has been demonstrated in regions close to the wall including the buffer layer.

ANALYSIS

1. Introduction

The total shear associated with the transport of momentum in the direction normal to the wall is given by

$$\tau = \mu \frac{\partial u}{\partial y} - \overline{\rho v' u'} \quad (1)$$

If a concept of an eddy viscosity is adopted the turbulent contribution may be expressed by the relation

$$-\overline{\rho v' u'} = \rho \epsilon \frac{\partial \bar{u}}{\partial y} \quad (2)$$

where Eq. (2) is taken as a definition of the eddy viscosity. In terms of the nondimensional quantities $y^+ = (\rho u^* y)/\mu$, $u^+ = \bar{u}/u^*$, $\epsilon^+ = \rho \epsilon/\mu$; where $u^* = (\tau_w/\rho)^{1/2}$, Eqs. (1) and (2) may be combined in the form

$$\frac{\tau}{\tau_w} = (1 + \epsilon^+) \frac{\partial u^+}{\partial y^+} \quad (3)$$

or

$$(u_\tau^+)^2 = (1 + \epsilon^+) \frac{\partial u^+}{\partial y^+} \quad (3')$$

where $u_\tau^+ = u_\tau/u^* = [\tau/\tau_w]^{1/2}$ is the nondimensionalized friction velocity.

Transforming the variables from (x, y) to (x, u) yields Eq. (3') in the desired form i.e.

$$\epsilon^+ + 1 = (u_\tau^+)^2 \frac{\partial y^+}{\partial u^+} \quad (4)$$

By dimensional analysis considerations, Prandtl in his momentum transport theory⁶ proposed an eddy viscosity model which in the present notation takes the form

$$\epsilon^+ = k_1^2 (y^+)^2 \frac{du^+}{dy^+} \quad (5)$$

where partial derivatives have been replaced by an ordinary derivative to indicate a dependence on a single variable. Eliminating du^+/dy^+ from Eq. (5) by Eq. (3') where ϵ^+ is taken much larger than unity yields an equivalent model in the form,

$$\epsilon^+ = k_1 u_\tau^+ y^+ \quad (6)$$

The model given by Eq. (6) has been previously used by Ferrari⁷ in several problems and specifically in problems related to turbulent boundary layer separation. Eqs. (4) and (6) in conjunction with the requirement of $(y^+)^3$ decay at the wall constitute the basis for the derivation of the complete velocity distribution and eddy viscosity formulation given below.

2. Constant Shear Solution

If the shear is assumed constant, $u_\tau^+ = 1$, and Eqs. (4) and (6) become

$$\epsilon^+ = \frac{dy^+}{du^+} \quad (4')$$

and

$$\epsilon^+ = k_1 y^+$$

In Eq. (4') ϵ^+ is taken much larger than unity and a dependence on a single variable is assumed.

Eliminating ϵ^+ between Eqs. (4') and (6') and integrating yields, the logarithmic law

$$u^+ = \frac{1}{k_1} \ln y^+ + k_2' = \frac{1}{k_1} \ln k_2 y^+ \quad (7)$$

where $k_1 = 0.4$ is the von Karman universal constant, and k_2 is taken equal to 7.7 which is obtained from $k_2' = 5.1$.

Using u^+ as the independent variable Eq. (7) is written as

$$y^+ = \frac{1}{k_2} \exp(k_1 u^+) \quad (8)$$

and correspondingly the expression for ϵ^+ becomes

$$\epsilon^+ = \frac{k_1}{k_2} \exp(k_1 u^+) \quad (9)$$

In order to extend the above solution to the wall (i.e. $y^+ = 0$) the behavior of $\overline{\rho v' u'}$ and \bar{u} must be specified in this region. For the immediate vicinity of the wall, Reichardt² has shown that the turbulent shear varies proportionally to at least the cubic power of the distance from the wall, and since for the same region the mean velocity \bar{u} varies linearly with the same dimension it follows from the definition $-\overline{\rho v' u'} = \rho \epsilon \partial \bar{u} / \partial y$ that

$$\rho \epsilon \sim y^3 \sim \bar{u}^3 \quad (10)$$

Now including a correction term in Eq. (9), ϵ^+ may be written in the form

$$\epsilon^+ = \frac{k_1}{k_2} [\exp(k_1 u^+) + f(k_1 u^+)] \quad (11)$$

where f must satisfy the asymptotic condition

$$\lim_{y^+ \rightarrow \infty} f(k_1 u^+) \exp(-k_1 u^+) = 0 \quad (12')$$

and, in accordance with Eq. (10), the boundary conditions

$$f(0) = f'(0) = f''(0) = -1 \quad (12'')$$

While Eq. (12) obviously does not define f uniquely, an exponential representation for f in the form $c_1 \exp(c_2 k_1 u^+)$ where c_1 and c_2 are arbitrary constants is clearly excluded by Eqs. (12') and (12''). Taking then the highest degree polynomial which satisfies both conditions and at the same time does not introduce new arbitrary constants yields,

$$f(k_1 u^+) = -\left[1 + (k_1 u^+) + \frac{1}{2}(k_1 u^+)^2\right] \quad (13)$$

Accordingly, the modified expression for ϵ^+ becomes,

$$\epsilon^+ = \frac{k_1}{k_2} \left\{ [\exp(k_1 u^+)] - \left[1 + (k_1 u^+) + \frac{1}{2}(k_1 u^+)^2\right] \right\} \quad (14)$$

Inserting Eq. (14) into Eq. (4) with $u_\tau^+ = 1$, and integrating subject to the boundary condition $y^+ = 0$ yields the velocity distribution

$$y^+ = u^+ + \frac{1}{k_2} \left\{ [\exp(k_1 u^+)] - \left[1 + (k_1 u^+) + \frac{1}{2}(k_1 u^+)^2 + \frac{1}{6}(k_1 u^+)^3\right] \right\} \quad (15)$$

A plot of Eq. (15) is given in Fig. (1) where the classical law of the wall and the laminar velocity distribution for the sublayer are included for comparison. Fig. (2) is a reproduction of Fig. (3) of Lindgren's recent report on experiments in turbulent pipe flow of distilled water⁸. The solid line is a plot of Eq. (15) using the $\log_{10} y^+$ representation. The agreement with these measurements is surprisingly good within the range $0 < u^+ < 18$. The deviation beyond this region, although small in the beginning, becomes more and more significant as the wake region is penetrated.

A comparison between ϵ^+ as given by Eq. (14) and the measurement of

Abbrecht and Churchill⁹ are shown in Fig. (3). While the agreement is by no means as satisfactory as in the case of the velocity distribution the deviation assumes a maximum value of less than 10% around $y^+ \approx 75$ and then starts to drop again. In the velocity distribution, where y^+ is obtained as an integral quantity of ϵ^+ with respect to u^+ , this deviation becomes completely insignificant.

3. Variable Shear Solution

The velocity distribution obtained in the previous section was based on the constant shear assumption. The result obtained is "universal" in the sense that independent of the Reynolds number, y^+ is a function of u^+ only. In order to obtain a more general form for the law of the wall the simplification introduced into the analysis by taking $u_\tau^+ = 1$ in Eq. (6) will be dropped. Thus, following the same procedure as in the previous case, Eqs. (4) and (5) are written first for the region where $\epsilon^+ \gg 1$, namely

$$\epsilon^+ = u_\tau^{+2} \frac{dy^+}{du^+} \quad (16)$$

$$\epsilon^+ = k_1 u_\tau^+ y^+ \quad (17)$$

Introducing a new variable

$$U = \int_{u_\tau^+}^{u^+} \frac{du'}{u_\tau^+} \quad (18)$$

into Eqs. (16) and (17) and eliminating ϵ^+ results in the equation

$$k_1 y^+ = \frac{dy^+}{dU} \quad (19)$$

which upon integration gives,

$$U = \frac{1}{k_1} \ln y + K_2' = \frac{1}{k_1} \ln K_2 y^+$$

A comparison of this result with the known solution for the $u_\tau^+ = 1$ case yields $K_2 = k_2$; and the logarithmic law becomes

$$U = \frac{1}{k_1} \ln k_2 y^+ \quad (20)$$

Thus, for regions where $\epsilon^+ \gg 1$ the logarithmic law of the wall holds independent of the particular shear distribution provided U replaces u^+

as the variable. Taking U as the independent variable,

$$y^+ = \frac{1}{k_2} \exp(k_1 U) \quad (21)$$

and

$$\epsilon^+ = u_\tau^+ \frac{k_1}{k_2} \exp(k_1 U) \quad (22)$$

Now, since independent of the nature of the shear distribution there always exists a narrow region close enough to the wall where U may be taken equal to u^+ , it follows from Reichardt condition that

$$\epsilon^+ \sim (y^+)^3 \sim (u^+)^3 \sim (U)^3$$

and consequently by the identical arguments of the previous section,

$$\epsilon^+ = u_\tau^+ \frac{k_1}{k_2} \left\{ [\exp(k_1 U)] - [1 + (k_1 U) + \frac{1}{2}(k_1 U)^2] \right\} \quad (23)$$

Integrating the equation

$$\epsilon^+ + 1 = u_\tau^+ \frac{dy^+}{dU}$$

subject to the boundary condition $y^+ = 0$ at $U = 0$ yields the generalized law of the wall in the form,

$$y^+ = \int_0^U \frac{dU'}{u_\tau^+} + \frac{1}{k_2} \left\{ [\exp(k_1 U)] - [1 + (k_1 U) + \frac{1}{2}(k_1 U)^2 + \frac{1}{6}(k_1 U)^3] \right\} \quad (24)$$

It should be noted here that there is a fundamental difference between Eq. (24) and Eq. (15). While Eq. (15) represents y^+ as a function of u^+ only Eq. (24) may depend on the Reynolds number as for example in a pipe where the shear is given by

$$\frac{\tau}{\tau_w} = 1 - \frac{2y}{d} \quad (25)$$

Now, if Eq. (24) is to predict the correct velocity distribution for a pipe it remains to explain the apparently good agreement of Eq. (15) with experimental data where the shear was assumed constant. Since in pipe flow seventy to eighty percent of the centerline velocity is attained within a region close to the wall, corresponding to $2y/d$ of the order of fifteen to twenty percent, and, since beyond this region the flow field is definitely within the region of the law of the wake it is required (1) to show that Eq. (24) and Eq. (15) do coincide within the range $0 < 2y/d < 0.20$

to a close approximation independent of the shear variation and (2) to determine the Reynolds number dependence of the law of the wall in a pipe.

In terms of the nondimensionalized variables, the friction velocity for the pipe is given by

$$u_{\tau}^{+} = (1 - \frac{2y}{d})^{\frac{1}{2}} \approx (1 - \frac{2y^{*}}{d^{*}})^{\frac{1}{2}} \quad (26)$$

which for small values of the ratio $2y/d$ may also be written as,

$$u_{\tau}^{+} = 1 - y^{*}/d^{*} + O[(y^{*}/d^{*})^2] \quad (26')$$

For the zero order solution of (24), designated by y_0^{+} , let $u_{\tau}^{+} = (u_{\tau}^{+})_0 = 1$. Correspondingly $U = u^{+}$; the integral term reduces to U and therefore to u^{+} ; and, thus the velocity distribution of Eq. (15) is recovered. For the first order solution let

$$u_{\tau}^{+} = (u_{\tau}^{+})_1 = 1 - \frac{y_0^{+}}{d^{+}}$$

Hence,

$$U = \int_0^{\frac{u^{+}}{u_{\tau}^{+}}} \frac{du'}{u_{\tau}^{+}} = \int_0^{u^{+}} (1 + \frac{y_0^{+}}{d^{+}}) du' = u^{+} +$$

$$+ (d^{+})^{-1} \left[\frac{1}{2} (u^{+})^2 + \frac{1}{k_1 k_2} \left\{ [\exp(k_1 u^{+})] - \left[1 + (k_1 u^{+}) + \frac{1}{2} (k_1 u^{+})^2 + \frac{1}{6} (k_1 u^{+})^3 + \frac{1}{24} (k_1 u^{+})^4 \right] \right\} \right] \quad (27)$$

and taking into account that $y_0^{+}(u^{+}) \equiv y_0^{+}(U)$,

$$\underline{I} = \int_0^{\frac{U}{u_{\tau}^{+}}} \frac{dU'}{u_{\tau}^{+}} = \int_0^U (1 + \frac{y_0^{+}}{d^{+}}) dU' = U +$$

$$+ (d^{+})^{-1} \left[\frac{1}{2} U^2 + \frac{1}{k_1 k_2} \left\{ [\exp(k_1 U)] - \left[1 + (k_1 U) + \frac{1}{2} (k_1 U)^2 + \frac{1}{6} (k_1 U)^3 + \frac{1}{24} (k_1 U)^4 \right] \right\} \right] \quad (28)$$

With U as a known function of u^{+} and \underline{I} resolved in terms of U , Eqs. (27) and (28) in conjunction with Eq. (27) completely describe the dependence of the velocity distribution on the Reynolds number $d^{+} = u^{*}d/\nu$.

As an immediate consequence of this solution it is apparent that for any fixed value of u^{+} , y_1^{+} approaches the constant shear solution y_0^{+} as the Reynolds number d^{+} approaches infinity. This result may also be directly

inferred from Eq. (20) since a fixed u^+ implies a fixed y_o^+ .

In order to assess the maximum deviation between y^+ and y_o^+ it is necessary to consider the asymptotic region where independent of how large d^+ is, the ratio $2y_o^+/d^+$ may assume values up to 0.20. For the asymptotic region Eq. (27) and (28) reduce respectively to

$$U = u^+ + \frac{1}{d^+} \frac{1}{k_1 k_2} \exp(k_1 u^+) \quad (27')$$

and

$$\underline{I} = U + \frac{1}{d^+} \frac{1}{k_1 k_2} \exp(k_1 U) \quad (28')$$

Substituting Eq. (28') in Eq. (24) yields

$$y^+ = U + \left(\frac{1}{d^+ k_1} + 1\right) \frac{1}{k_2} \exp(k_1 U) \quad (29)$$

where for the time being quantities of the order of $(d^+)^{-1}$ are retained with respect to U.

Using Eq. (27) to eliminate U from Eq. (29) yields

$$y^+ = u^+ + \frac{1}{d^+} \frac{1}{k_1 k_2} \exp(k_1 u^+) + \left(\frac{1}{d^+ k_1} + 1\right) \frac{1}{k_2} \exp(k_1 u^+) \exp\left[\frac{1}{d^+} \frac{1}{k_2} \exp(k_1 u^+)\right].$$

Now, since asymptotically $y_o^+ = \frac{1}{k_2} \exp(k_1 u^+)$ the above equations may be written as

$$\begin{aligned} y_1^+ &= u^+ + \frac{1}{k_1} \frac{y_o^+}{d^+} + \left(\frac{1}{d^+ k_1} + 1\right) y_o^+ \exp\left(\frac{y_o^+}{d^+}\right) = \\ &= u^+ + \frac{1}{k_1} \frac{y_o^+}{d^+} + \left(\frac{1}{d^+ k_1} + 1\right) y_o^+ \left(1 + \frac{y_o^+}{d^+} + 0 \left[\left(\frac{y_o^+}{d^+}\right)^2\right]\right) \\ &= (u^+ + y_o^+) + \frac{y_o^+}{d^+} y_o^+ + \frac{2}{k_1} y_o^+ + 0 \left[\left(\frac{y_o^+}{d^+}\right)^2\right] \end{aligned}$$

But since $y_o^+ \gg u^+$ and $y_o^+ \gg \frac{2}{k_1}$ the asymptotic value of y_1^+ becomes

$$y_1^+ = y_o^+ \left[1 + \frac{y_o^+}{d^+}\right] + 0 \left[\left(\frac{y_o^+}{d^+}\right)^2\right] \quad (30)$$

While as far as y_1^+ is concerned, this deviation may be as large as ten percent, as far as the velocity distribution is concerned where u^+ is taken proportional to $\ln y^+$, the deviation $\Delta u^+/u^+$ given by

$$\frac{\Delta u^+}{u^+} = \frac{\ln y^+ - \ln y_0^+}{\ln y_0^+} \sim \frac{y_0^+/d^+}{\ln y_0^+}$$

is approximately within one percent.

A different interpretation of this result may be given as follows. Let y^+ be taken as a function of d^+ then at a fixed value of y_0^+

$$\frac{y_1^+}{y_2^+} = \left(1 + \frac{y_0^+}{d_1^+}\right) \left(1 - \frac{y_0^+}{d_2^+}\right) = 1 + y_0^+ \left(\frac{d_2^+ - d_1^+}{d_1^+ d_2^+}\right)$$

Thus, for $d_2^+ > d_1^+ \Rightarrow y_1^+ > y_2^+$. Furthermore, since at increasing values of y_0^+ the difference between y_1^+ and y_2^+ increases, it follows that as the Reynolds number increases the slope of the straight line in the $u^+ \sim \ln y^+$ representation increases and correspondingly the intersection with the $y^+ \leq 1$ line occurs at a lower value of the u^+ coordinate. In terms of the notation

$$u^+ = \frac{1}{k_1} \ln y^+ + k_2'$$

it means that $1/k_1$ increases while k_2' decreases with an increasing Reynolds number. This dependence on the Reynolds number has been shown to exist in Nikuradse's data by Hinze⁵.

In order to see the effect of the Reynolds number on the laminar sublayer a series expansion of the solution in this neighborhood is considered. Accordingly

$$y^+ = u^+ + \frac{1}{k_2} \frac{1}{24} (k_1 u^+)^4 + (d^+)^{-1} [(u^+)^2 + \frac{1}{k_1 k_2} \frac{11}{120} (k_1 u^+)^5 + \dots] \quad (31)$$

By comparing this result to the strictly laminar distribution

$$u^+ = y^+ - (d^+)^{-1} y^{+2}$$

which for large Reynolds numbers and $y/d < 1/2$ may be written in the form,

$$y^+ = u^+ + (d^+)^{-1} u^{+2} + O[(d^+)^{-2}]$$

the extent of the laminar sublayer may be obtained from the condition

$$\frac{1}{k_2} \frac{1}{24} (k_1 u^+)^4 < (d^+)^{-1} (u^+)^2$$

Taking as the definition of the edge of the laminar sublayer the point where

$$\frac{1}{k_s} \frac{1}{24} (k_s u_{S.L.}^+)^4 = 0.1 (d^+)^{-1} (u_{S.L.}^+)^2 \quad (32)$$

yields, after introducing the numerical constants

$$u_{S.L.}^+ \simeq 27 (d^+)^{\frac{1}{2}}$$

and by substitution into Eq. (31)

$$y_{S.L.}^+ \simeq 27 \left(\frac{u^* d}{\nu} \right)^{-\frac{1}{2}}$$

or

$$\frac{y_{S.L.}}{d} \simeq 27 \left(\frac{u^* d}{\nu} \right)^{-3/2} \quad (33)$$

Hence, it follows that the laminar sublayer has a thickness proportional to the inverse three half power of the Reynolds number based on the frictional velocity, and the diameter d .

4. The Law of the Wall for Injection or Suction

The shear distribution in the wall region with injection or suction is determined for a flat plate with zero pressure gradient from the equation,

$$\nu \frac{du}{w dy} = \frac{1}{\rho} \frac{d\tau}{dy} \quad (34)$$

Integrating (34) yields

$$\frac{\tau}{\tau_w} = \frac{\rho \nu w u}{\tau_w} + 1$$

which in the present notation may be written as

$$(u_{\tau}^+)^2 = v_w^+ u^+ + 1 \quad (35)$$

where $v_w^+ = \nu w / u^*$

From Eq. (18)

$$U = \int_0^{u^+} \frac{du'}{d\tau^+} = \int_0^{u^+} \frac{du'}{o(v_w^+ u^+ + 1)^{\frac{1}{2}}} = \frac{2}{v_w^+} [(1 + v_w^+ u^+)^{\frac{1}{2}} - 1] \quad (36)$$

and the integral term in Eq. (27) becomes,

$$I = \int_0^U \frac{du'}{u'^+} = \int_0^{u^+} \frac{du'}{(u'^+)^2} = \frac{1}{v_w^+} \ln[1+v_w^+ u^+] = \frac{2}{v_w^+} \ln\left[1+\frac{v_w^+ U}{2}\right] \quad (37)$$

Substituting Eq. (36) into Eq. (24) yields the law of the wall for injection or suction in the form,

$$y^+ = \frac{2}{v_w^+} \ln\left[1+\frac{v_w^+ U}{2}\right] + \frac{1}{k_s} \left\{ [\exp(k_1 U)] - \left[1 + (k_1 U) + \frac{1}{2}(k_1 U)^2 + \frac{1}{6}(k_1 U)^3\right] \right\} \quad (38)$$

where U is given by Eq. (36). Now, either from the asymptotic form of Eq. (38) or directly from Eq. (20), the region outside the laminar sublayer and the buffer layer is described by the equation

$$U = \frac{1}{k_1} \ln k_s y^+$$

Written explicitly in terms of u^+ as determined by Eq. (36), Eq. (20) becomes

$$\frac{2}{v_w^+} \left[(1+v_w^+ u^+)^{\frac{1}{2}} - 1 \right] = \frac{1}{k_1} \ln k_s y^+ \quad (35)$$

which is identically the modified law of the wall as suggested by Stevenson¹⁰ based on his experimental data.

In Fig. (4) the law of the wall for injection or suction is shown for four different cases (a) $v_w^+ = 0.45$ (b) $v_w^+ = 0.064$ (c) $v_w^+ = -0.051$ and (d) $v_w^+ = -0.066$. In Figs. (4a,b) the data of Stevenson is included while in Figs. (4c,d) the data from Black and Sarnecki¹¹, as measured by Black is presented. While in either the large injection or the large suction cases agreement is satisfactory, in the law v_w^+ cases where experimental scatter seems to be more pronounced, the agreement is at most fair.

It is important to note that as the injection rate increases the buffer region swells on the lower side of the distribution while the wake component appears at lower values of the parameter U , thus leaving an extremely narrow region for the logarithmic region. It seems however that as long as such a region exists regardless of how narrow it is, the buffer layer is satisfactorily represented by the present theory.

SUMMARY

A generalized law of the wall and an eddy viscosity model for wall boundary layers has been derived for regions of the flow field which depend only on a single space variable. The derivation is based on Reichardt's result, viz., that the turbulent shear decays as the cubic power of the distance from the wall and on the validity of the logarithmic law of the wall for a constant shear flow f_w ld .

Considering the velocity as the independent variable and expressing ϵ as a function thereof yields, in the constant shear case, a closed form solution for the velocity distribution. The resulting distribution is shown to be in good agreement with experimental data. Included in the comparison are some recent experiments where special care has been taken in order to obtain accurate measurements in the region very close to the wall.

By introducing a transformation, an extension of the above formulation to variable shear has been obtained. The generalized form has been then applied to the investigation of two problems (1) the effect of Reynolds number $(u^* d/\nu)$ on the velocity distribution in a pipe and (2) the derivation of the law of the wall for boundary layers with injection or suction.

In the first problem, it has been demonstrated that, although to a very small extent there is nonetheless a steepening effect on the slope of the logarithmic portion of the law of the wall with an increase in the Reynolds number. This result is in agreement with Hinze's analysis of Nikurudse's data. Furthermore, an expression for the thickness of the laminar sublayer has been obtained which shows that $(y_{S.L.}/d)$ is inversely proportional to the $3/2$ power of the Reynolds number $(u^* d/\nu)$.

In the second problem a law of the wall for injection or suction has been derived in terms of the parameter v_w^+ . Good agreement with available experimental data has been indicated and a tendency for a

decrease in the extent of the logarithmic portion of the law of the wall with increase of injection has been observed.

From the experimental data considered, it seems that the model proposed above correctly predicts the velocity distribution in the wall region for a variable shear flow. Obviously, a more complete description requires the matching of these results with an eddy viscosity for the outer region.

REFERENCES

1. Malkus, M. V. R. 1956 J. Fluid Mech. 2, 521.
2. Reichardt, H., 1951 Z. Angw. Math. u. Mech 31, 208.
3. Deissler, R. G., 1955 Tech. Report 1210.
4. van Driest, E. R., 1956 J. Aeronaut Sci., 23, 1007.
5. Hinze, J. O., Colloques. Intern. du Centre National de la Recherche Scientifique, Mechanique de la Turbulence, Marseill 1961.
6. Prandtl, L., 1925 Z. Angew. Math. u. Mech 5, 163.
7. Ferrari, C., 1957 NASA RE 2-8-59W.
8. Lindgren, E. R., 1965 Experimental Study on Turbulent Pipe Flows of Distilled Water, Oklahoma State University, Dep. Civil Eng., Rep. No. 1 (AD621071).
9. Abbrecht, P. H. and Churchill, S. W., 1960 A.I.Ch.E. Journal 6, 268.
10. Stevenson, J. N., 1963 C.O.A. Report Aero. No. 166.
11. Black, T. J. and Sarnecki, A. J., 1958 A.R.C. Rep. 20, 501.

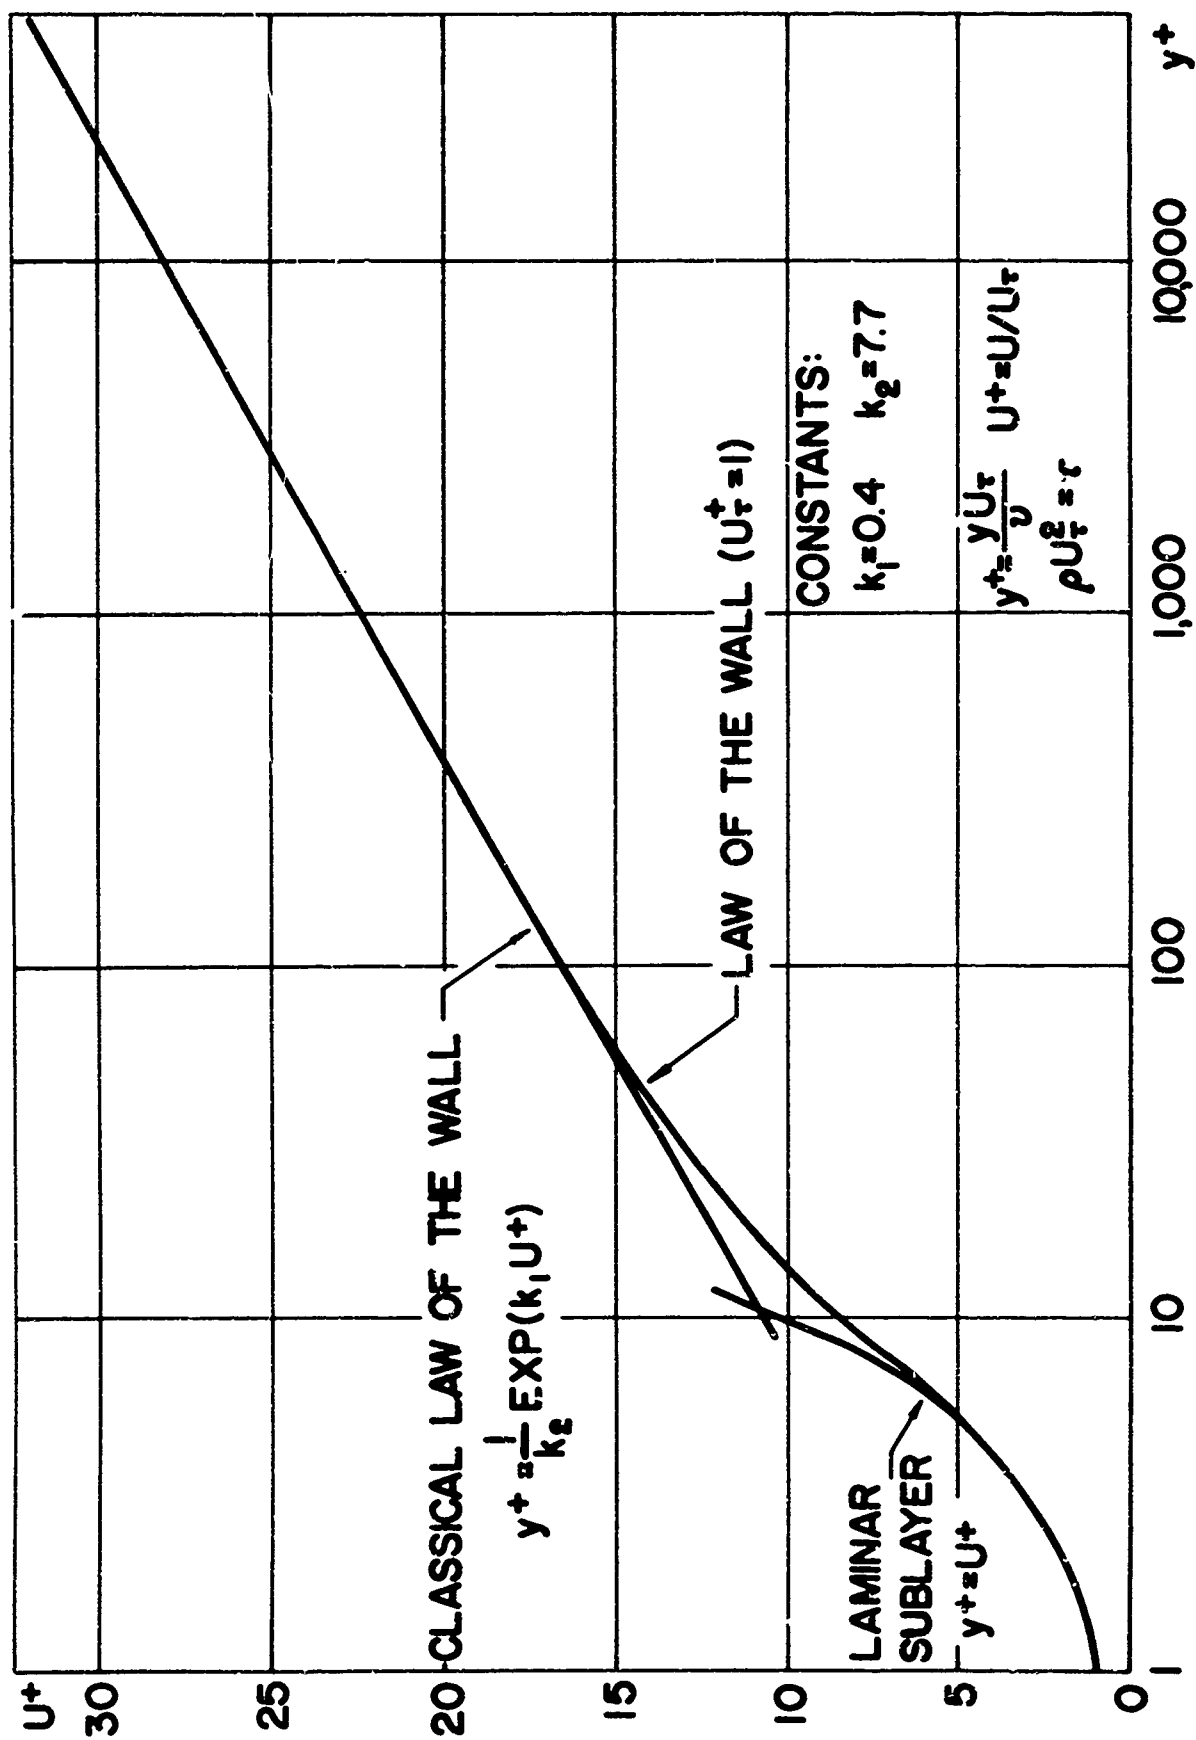


FIG. 1 THE LAW OF THE WALL FOR A CONSTANT SHEAR

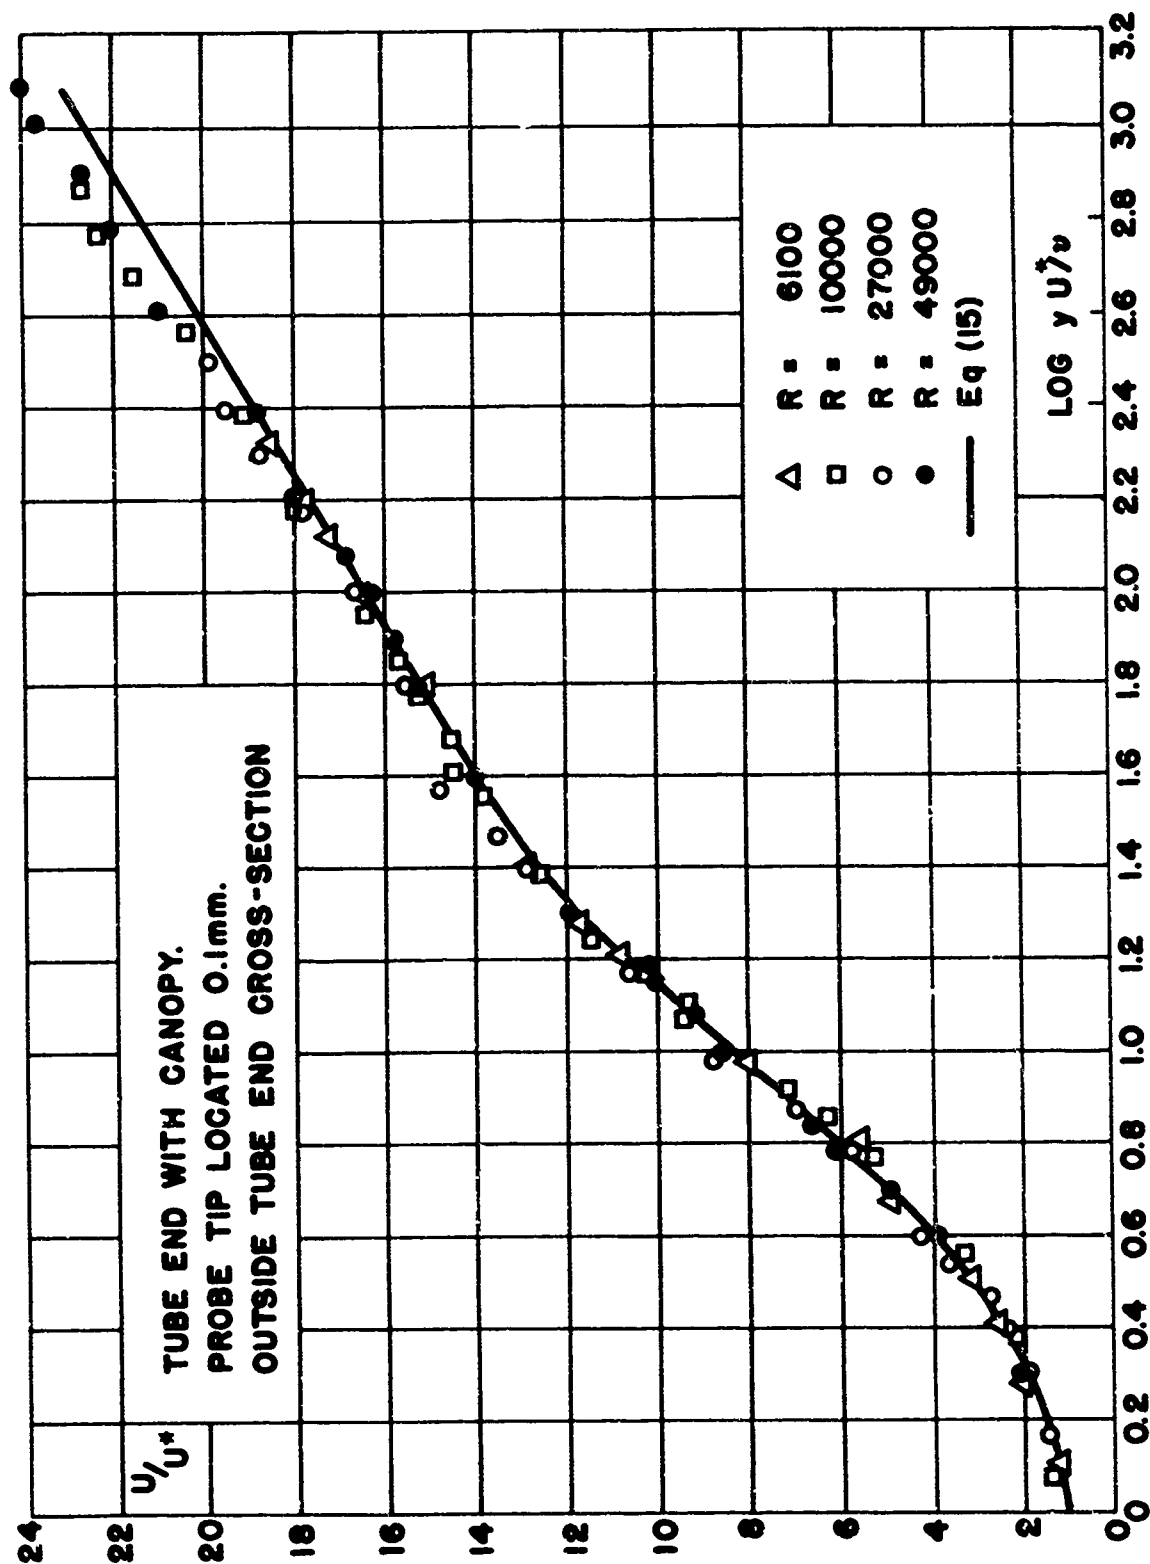


FIG. 2 A COMPARISON BETWEEN THE PRESENT ANALYSIS AND THE EXPERIMENTS OF LINDGREN⁹

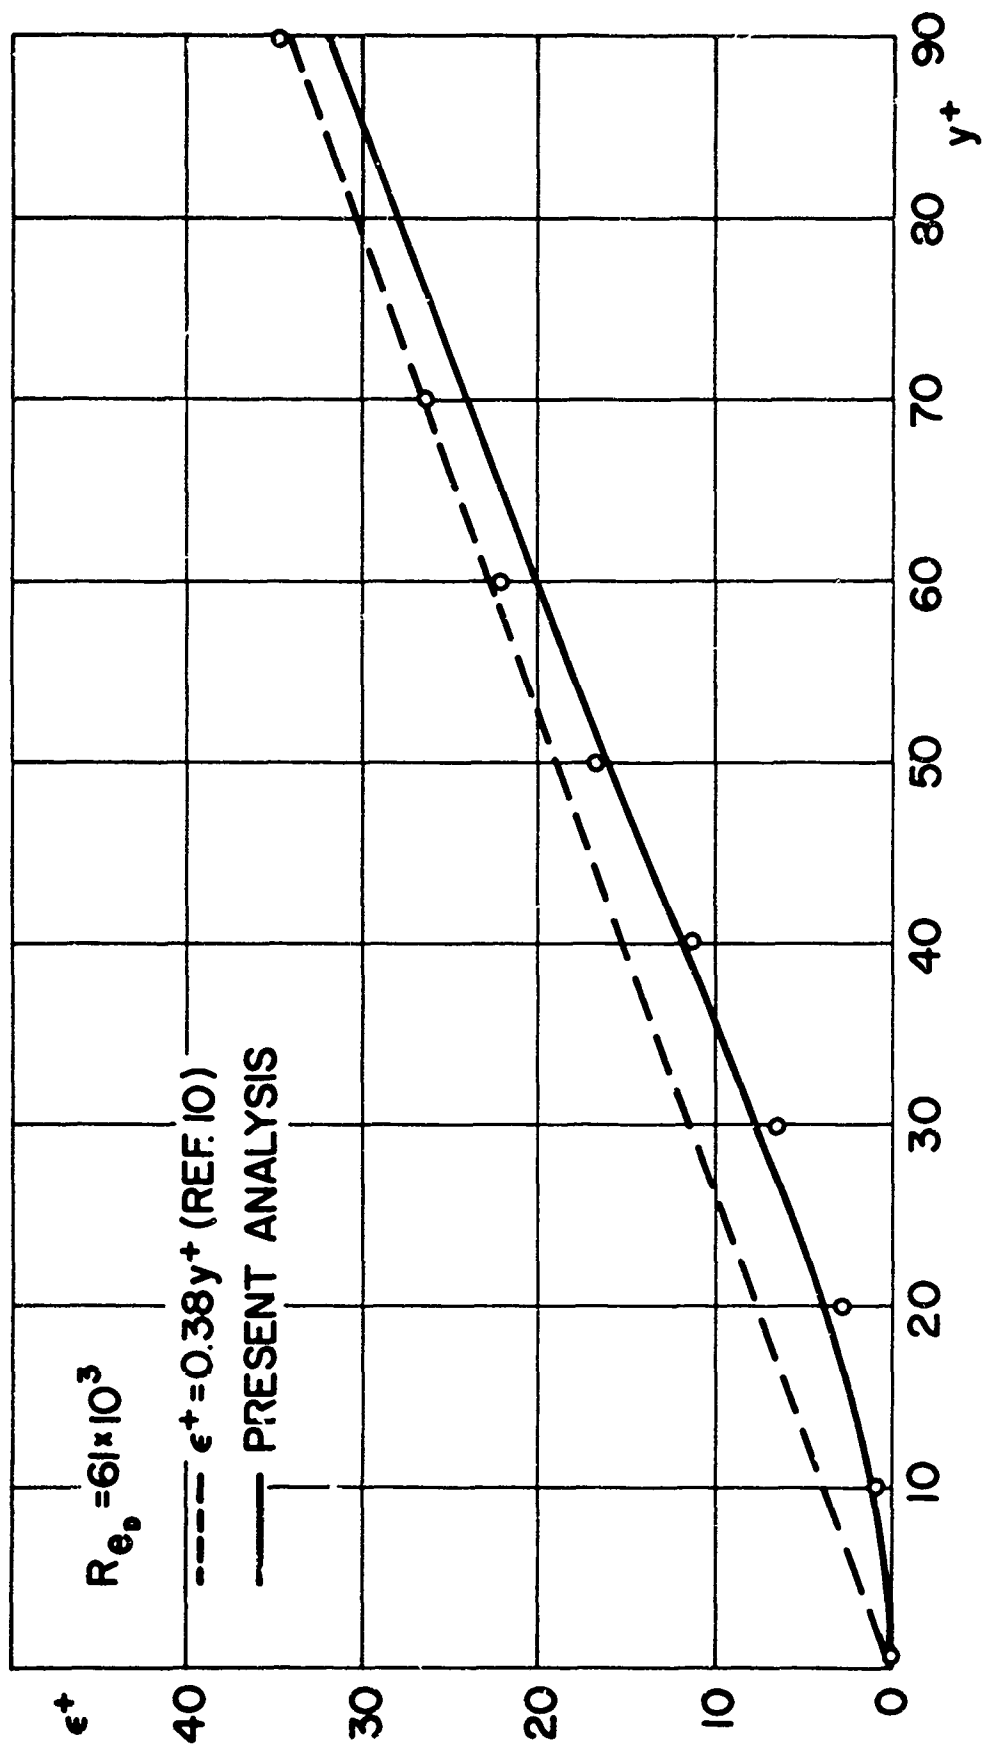


FIG. 3 VARIATION OF THE EDDY VISCOSITY IN THE WALL REGION CLOSE TO THE WALL (ABBRECHT AND CHURCHILL¹⁰)

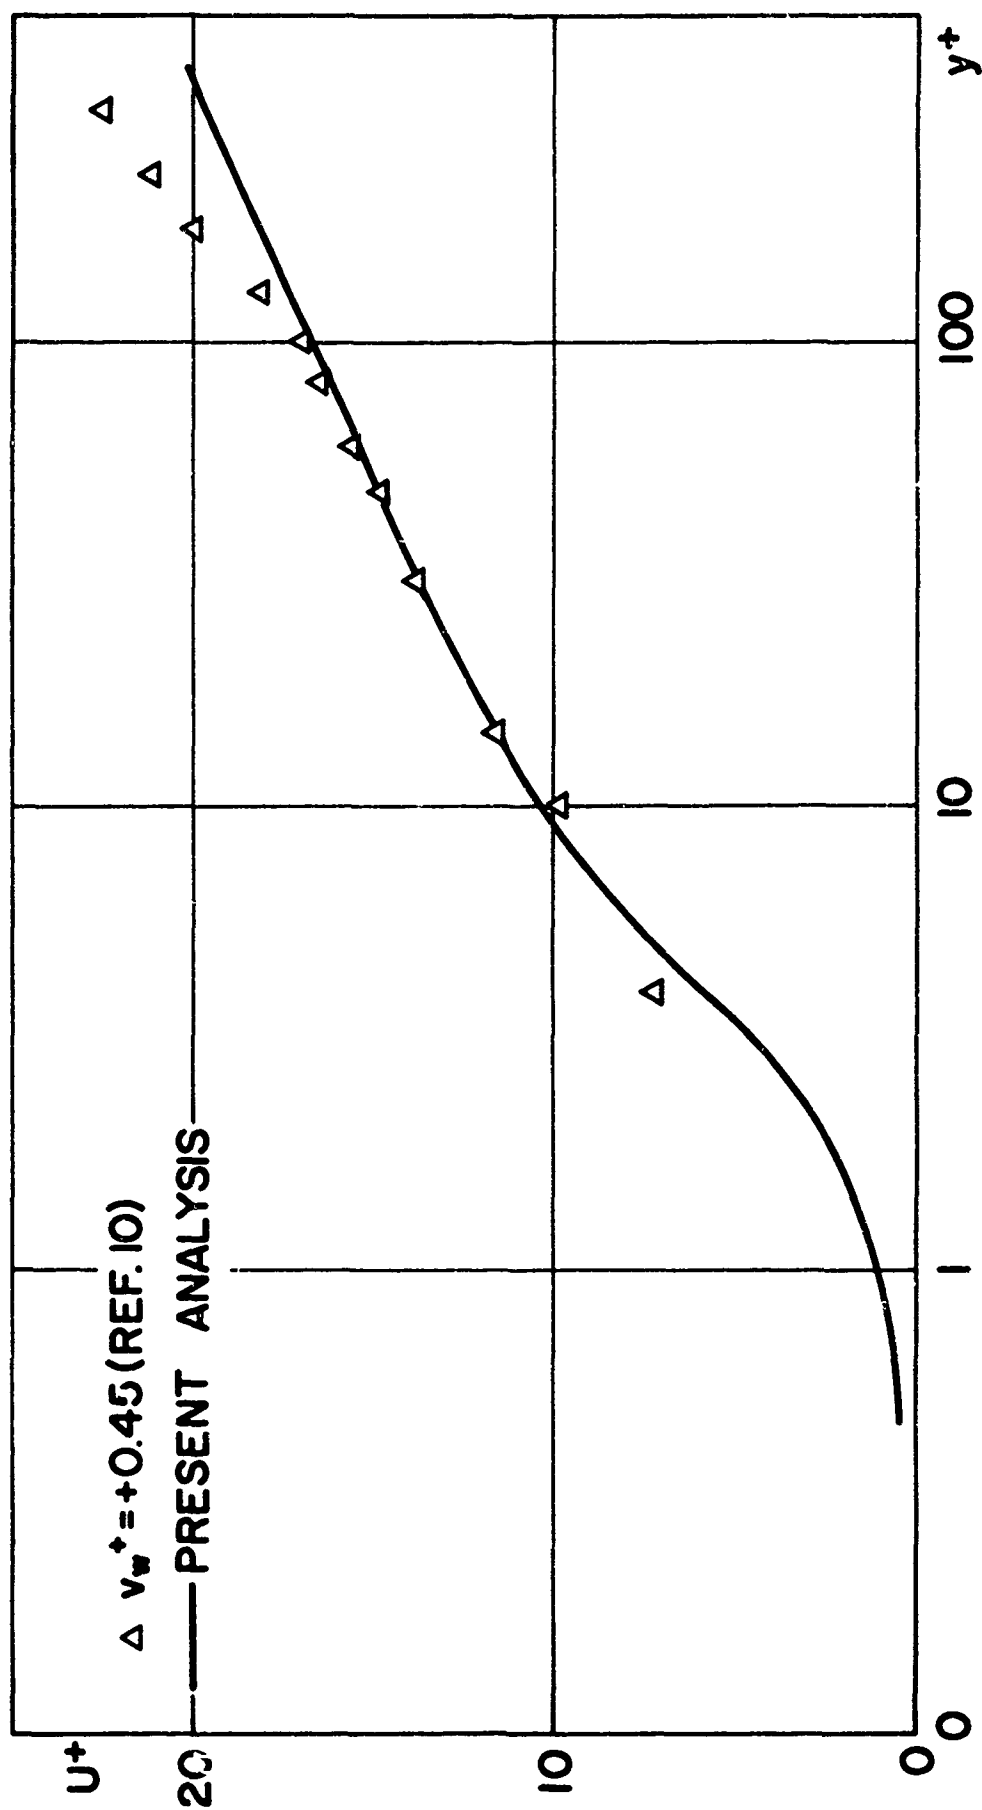


FIG. 4a LAW OF THE WALL FOR INJECTION OR SUCTION ($v_w^+ = +0.45$)

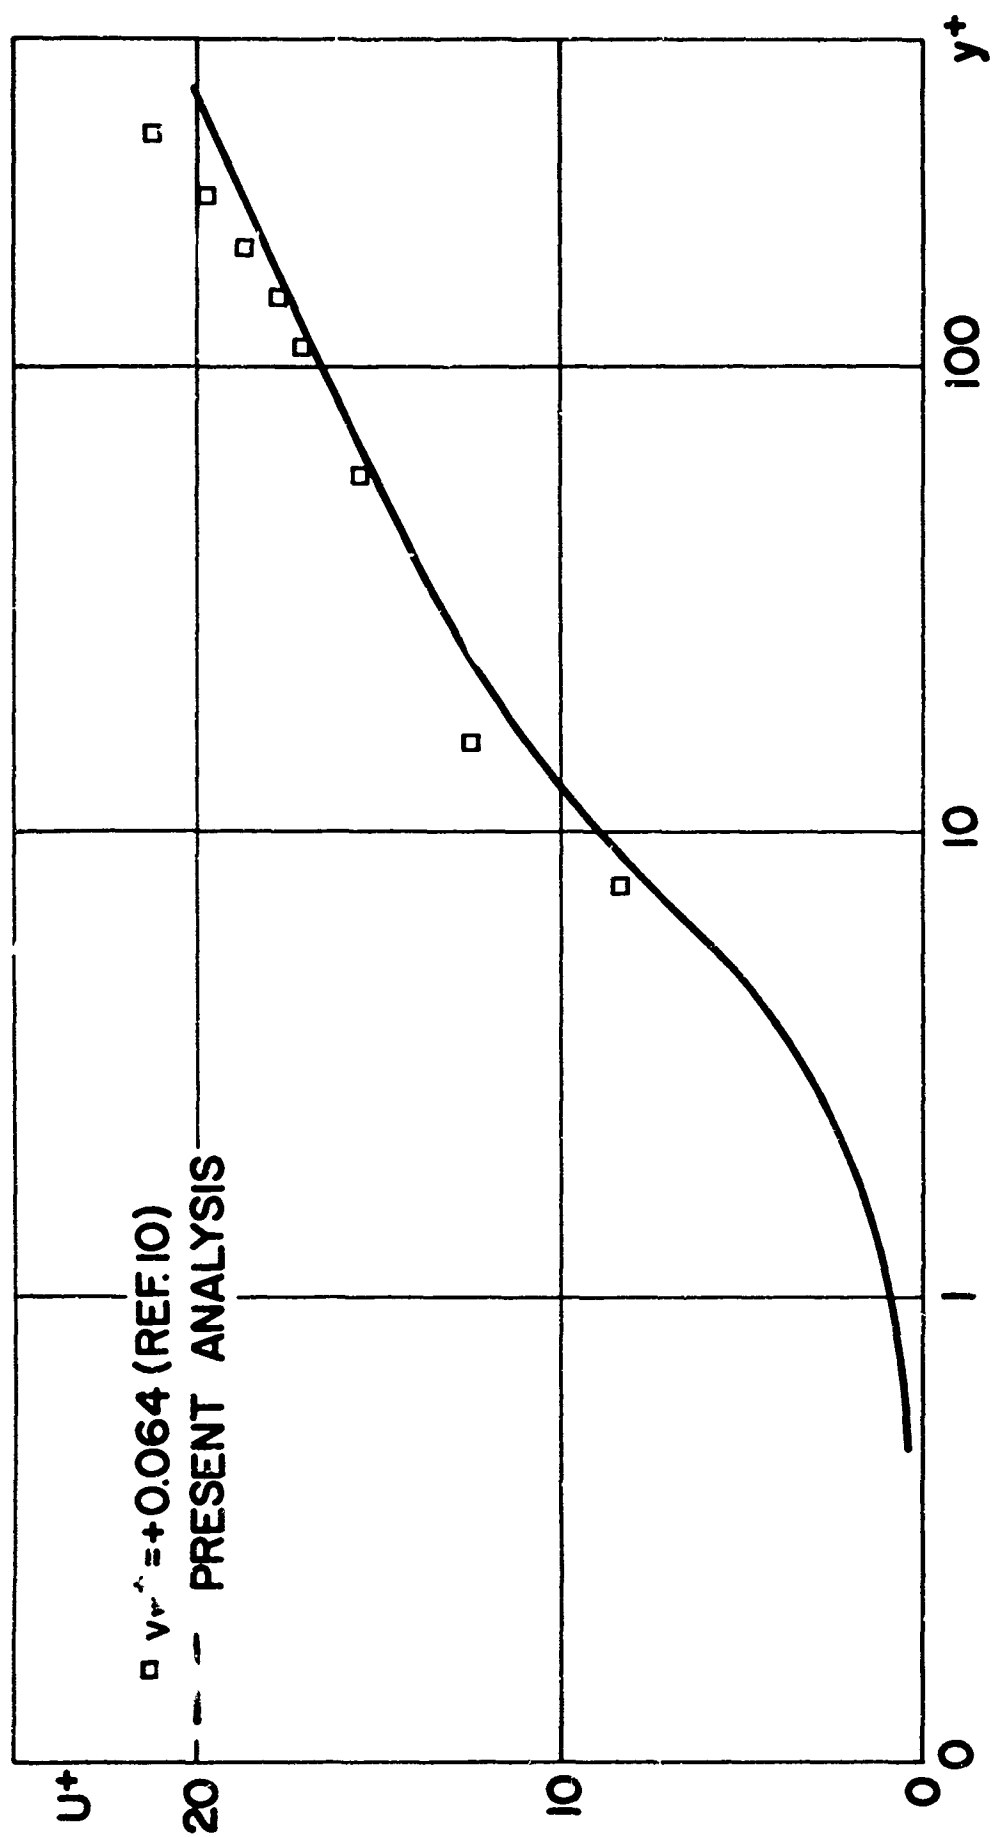


FIG. 4b LAW OF THE WALL FOR INJECTION OR SUCTION ($v_w^+ = +0.064$)

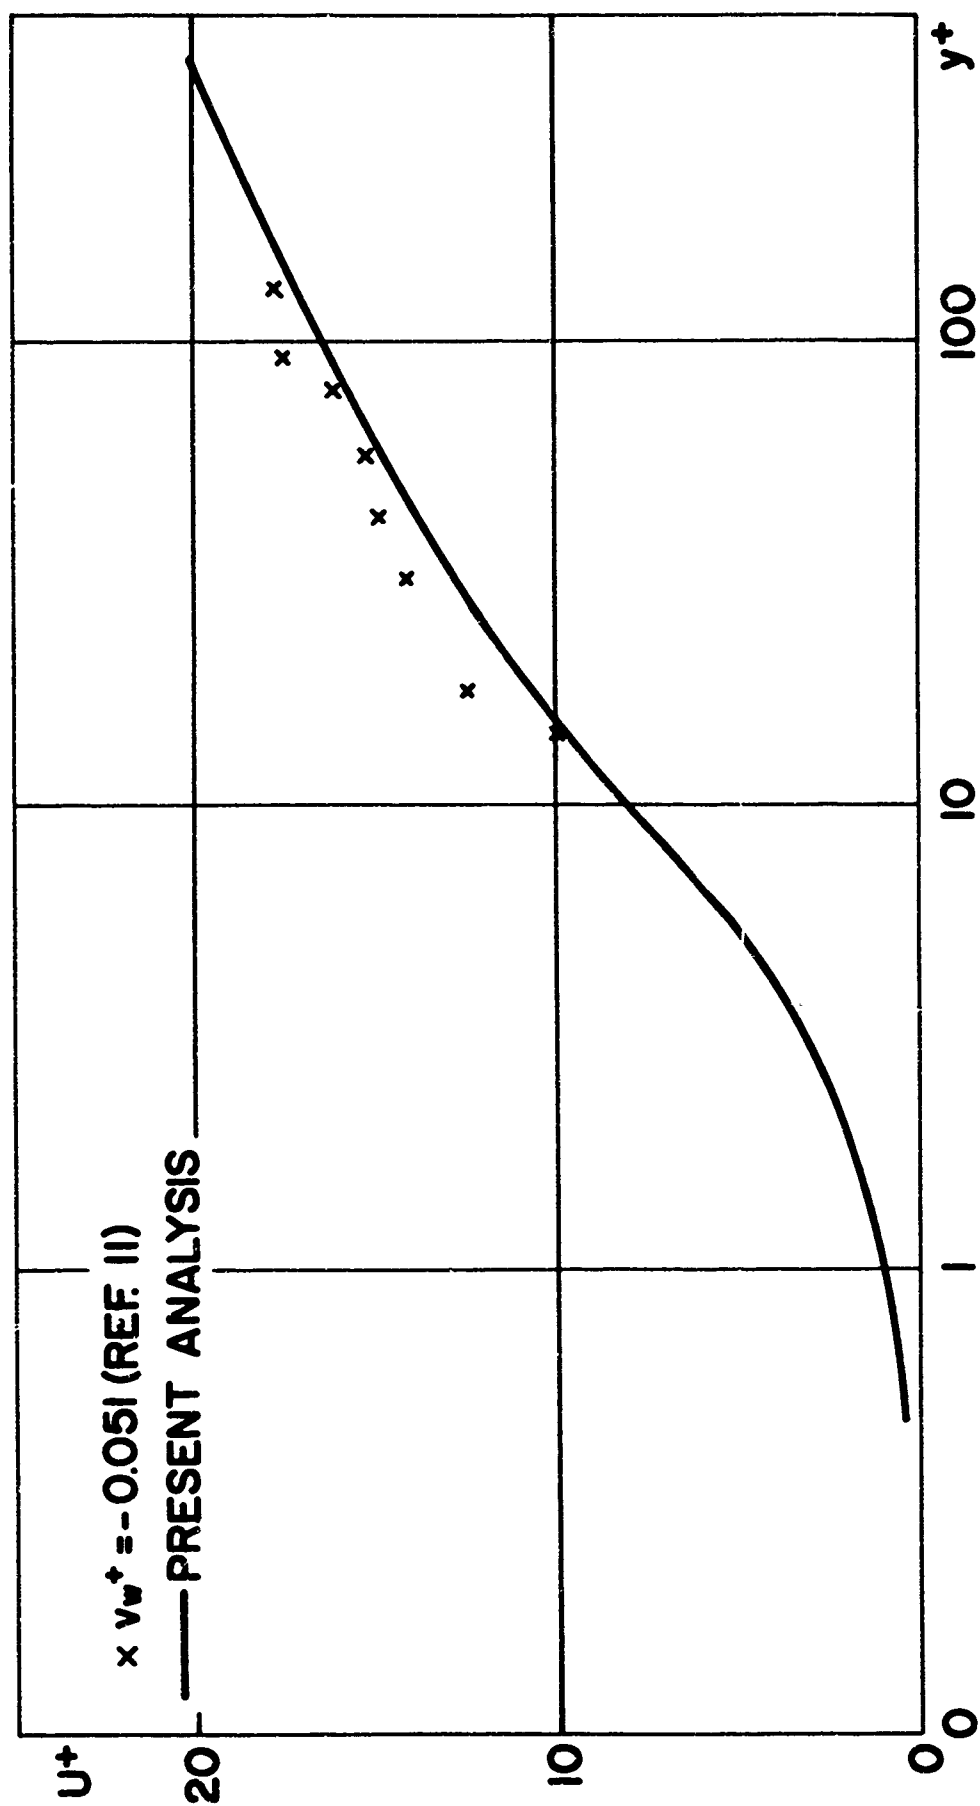


FIG. 4c LAW OF THE WALL FOR INJECTION OR SUCTION ($v_w^+ = -0.051$)

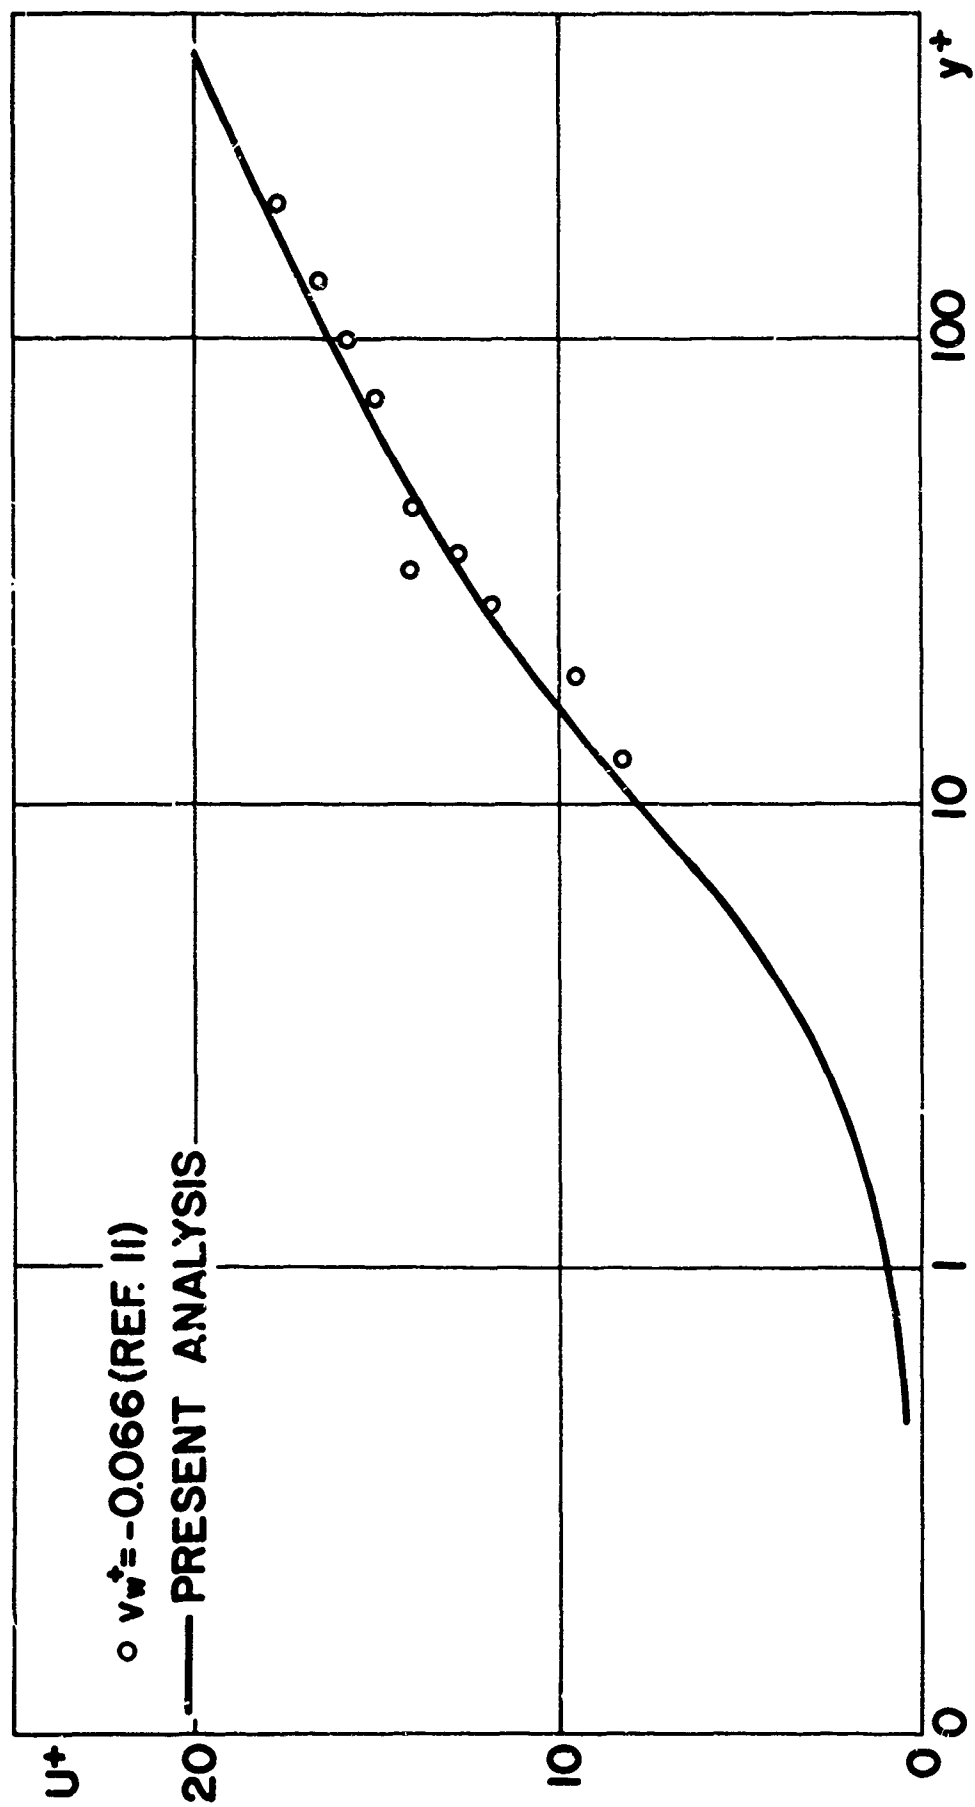


FIG. 4d LAW OF THE WALL FOR INJECTION OR SUCTION ($v_w^+ = -0.066$)

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION
New York University Bronx, New York		Unclassified
		2b. GROUP
3. REPORT TITLE		
Generalized Law of the Wall and Eddy Viscosity Model for Wall Boundary Layers		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)		
Scientific. Interim.		
5. AUTHOR(S) (Last name, first name, initial)		
Kleinstein, Gdalia		
6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
November 1966	28	11
8a. CONTRACT OR GRANT NO.	8a. ORIGINATOR'S REPORT NUMBER(S)	
AF33(615)-2215	NYU-AA-66-65	
A. PROJECT NO.		
7064		
C.	8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
61445014	ARL 66-0238	
4681307		
10. AVAILABILITY/LIMITATION NOTICES		
1. Distribution of this document is unlimited.		
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY
		Aerospace Research Laboratories (ARR) Wright-Patterson Air Force Base, Ohio
13. ABSTRACT		
<p>Based on the logarithmic velocity distribution at distances not so far from the wall and a turbulent shear variation proportional to the cubic power of the wall distance in the immediate proximity of the wall, an analytical model for an eddy viscosity throughout the wall region is derived leading to a closed form expression for the velocity distribution. An extension of the above analysis to include shear variation results in a generalized law of the wall from which the effect of Reynolds number on the velocity distribution is derived. While many applications of the generalized solution are envisaged, as an example, the velocity distribution for the case of injection or suction is considered. The theoretical result is shown to be in agreement with available experimental data.</p>		

DD FORM 1473
1 JAN 64

Unclassified

Security Classification

Unclassified
Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
eddy viscosity						
wall boundary layer						
law of the wall						
pipe flow						
injection or suction						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.